

संगणक एवं सूचना केन्द्र
Computer and Informatics Centre
भारतीय प्रौद्योगिकी संस्थान खड़गपुर
Indian Institute of Technology, Kharagpur

CONFIGURING WI-FI AUTHENTICATION ON LUMIA DEVICES

Note: You will have to configure each SSID only once if you use the same user id and password. This is a typical configuration for lumia devices, Screenshot may slightly differ depending upon devices.

First Time Configuration

1. Click on the desired secured SSID.



You will see the “connecting” screen.



disconnect
delete

You will get a screen as follows:



2. Fill up the form on the screen (scroll up/down as required). Set the values in the fields as follows:

Username: Type your ERP login id

Password: Type your network password (The network password you set in ERP, NOT your ERP password)


Server certificate validation: Choose **none** from drop-down menu

EAP method: Choose **PEAP MS-CHAP v2** from drop-down menu

Configure the proxy settings in the same manner as you do now for wi-fi access.

The image shows a mobile device screen with a 'SIGN IN' dialog. The dialog is titled 'SIGN IN' and indicates it is connecting to a secure WiFi network named 'CAMPUS_SECURED'. The 'Connect using' dropdown is set to 'username + password'. The 'Username' field contains '16042' and the 'Password' field is masked with dots. A 'Show password' checkbox is present and unchecked. Below the password field, the 'Server certificate validation' dropdown is set to 'none' and the 'EAP method' dropdown is set to 'PEAP MS-CHAP v2'. At the bottom of the dialog are two buttons: 'done' and 'cancel'.

3. Click on "done". You can see the connecting page.

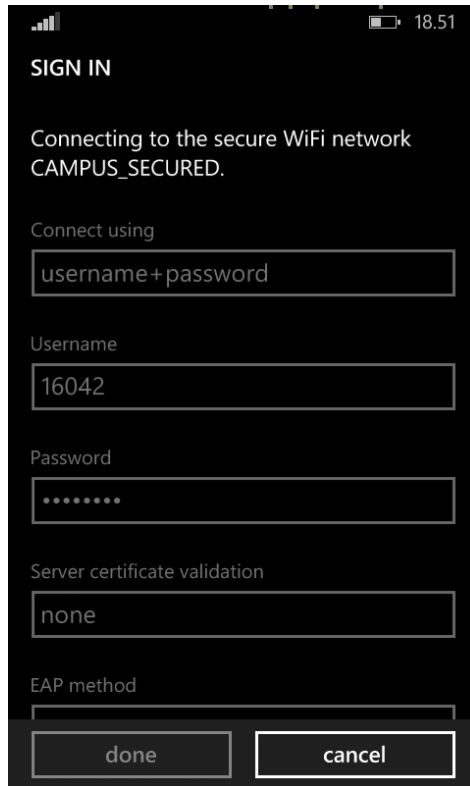

4. You can see that desired SSID is connected if proper input is given.



Configuring again if you want to use another user id, password on the same device or change your network password in ERP

OR

Configuring to forget or delete the SSID

(So that no one else using the same device can log in with your user id and password)

1. Tap on the desired SSID, then click on the “delete”.



edit

disconnect

delete

Note: if you forget the network, you will have to set the configuration again (in the same manner as for first time configuration) if you want to log in later in the same SSID with your user id and password.